

RESISTANCE THERMOMETER
Measuring insert: Fixed

Type:
RT-RTBC

5860-E230524V2.2




Application:

- For measuring temperatures in moveable parts such as bearings and axles
- For tasks that require easy and quick replacement of temperature sensors

Properties:

- Sensor Pt100 or Pt1000 in acc. with IEC 60751
- Measuring insert: Fixed
- Electrical connection: Cable type TBT (Teflon-Braid-Teflon)
- Process attachment: Bayonet coupling
- Outer protective sheath: Stainless acid-proof steel
- IP67
- Marine approved by: DNV·GL LR, NK, RINA, ABS and BV

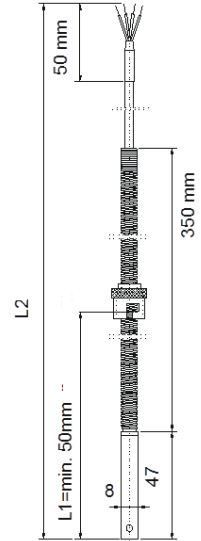

MECHANICAL SPECIFICATIONS:

Protective sheath: -----
EN 1.4571 (AISI3 16Ti), max. 850°C

Sensor diameter [mm]: -----
Ø8
Special

Nominal length L1 [mm]: -----
20 / 47
Special

Process attachment: -----
Bayonet coupling
Special

Sensor Bottom: -----
Steel
Silver (For quick reaction)

Connector: -----
1/4" BSP
Special

Connector length [mm]: -----
10 / 26 / 50

ELECTRICAL SPECIFICATIONS:

-----Sensor element:
1xPt100
2xPt100
1xPt1000

-----Number of conductors:
2-wire
3-wire
4-wire

-----Media temperatures max:
-50/+200°C
Special

-----Electrical connection:
Cable type TBT (Teflon-Braid-Teflon)
Special

-----Cable length:
3000 mm
Special

-----Tolerance in acc. with IEC 60751:
Type A DIN (i.e.±(0,15+0,002xTactual) °C)
Type B 1/1 DIN (i.e.±(0,3+0,005xTactual) °C)
Type B 1/3 DIN (i.e.±(0,1+0,0017xTactual) °C)
Type B 1/6 DIN (i.e.±(0,05+0,00083xTactual) °C)
Type B 1/10 IN(i.e.±(0,03+0,0005xTactual) °C)
Special

RESISTANCE THERMOMETER
Measuring insert: Fixed

Type:
RT-RTBC

5860-E230524V2.2



Calibration:

Temperature calibration are used to verify and certify the sensor to have the correct accuracy. We can do either: "In house" or "Accredited" calibration. Accredited is certified by 3.e part. Normally we do a calibration in 3 points.

Enhanced performance services:


Cold applications (below -50°C) will influence the material and the measurement. CRYO treatment is needed to ensure a correct and working sensor down to -196°C.

A sensor will always drift over time, especially when there are high temperature fluctuations.

With "Ageing treatment" we stabilize the sensor to ensure a minimum drift over time. The benefits are long term stability, more correct measurement and easier planning of calibration periods.

Documentation:

Please order the correct documentation when ordering the sensor.

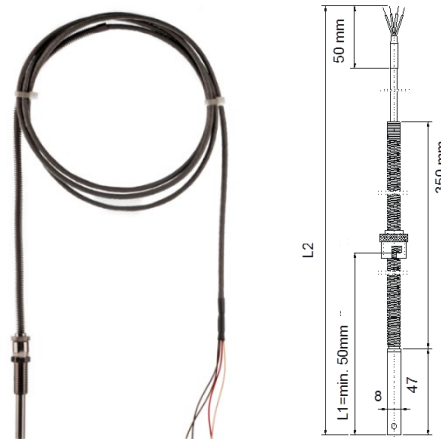

SIGNAL PROCESSING

Enclosure

Marine Box (112x82x42mm) -----

ABS Box (82x80x56mm) -----

NONE -----

Programmable mounted transmitter:

Measuring range min/max: -200/+850°C
Output: 2-wire, 4-20 mA
Min. span: 25°C
Ambient temperature min/max: -40/+85°C



- [5333A Uninsulated for RTD](#)
- [5333D EEX Uninsulated for RTD](#)
- [5332A Uninsulated for RTD](#)
- [5332D EEX Uninsulated for RTD](#)
- [5331A Galvanic Isolated RTD / TC](#)
- [5331D EEX Galvanic Isolated RTD / TC](#)
- [5335A Hart 5 Protocol Standard](#)
- [5335D Hart 5 Protocol CSA, FM, ATEX, IECEx](#)
- [5337A Hart 5 & 7 Protocol](#)
- [5337D Hart 5 & 7 Protocol CSA, FM, ATEX, IECEx](#)

Transmitter Type:			
4 mA =	C°	20 mA =	C°

- [5350A Profibus standard](#)
- [5350B Profibus ATEX, FM and CSA](#)

Link to further information:

[Transmitter Overview](#)

[Programmable rail mounted transmitter](#)

CALIBRATION

Calibration:

In house (Span -33°C - +700°C)

Accredited – in laboratory (-196°C - +1200°C)

1.	Point	°C
2.	Point	°C
3.	Point	°C

More point on request

Enhanced performance services

Cryo treatment.

For temperature sensor under -50°C

Ageing:

For long term stability.
Secure minimum drift of sensor accuracy

Documentation

Certificate: 3.1 Material
Certificate of origin
Certificate of conformity

Marine Certificate

Certificate of DNV·GL
Certificate of BV
Certificate of Rina
Certificate of ClassNK
Certificate of LR
Certificate of ABS

Other on request